CONTENUR

BILATERAL CRANE-LIFT RANGE

CRANE-LIFT CONTAINER

OPTIK 4m³

4000 L
Volume


1600 Kg
Load

1200 mm y **1500** mm
Height of front and rear openings

900 mm
Height of lateral openings



DIMENSIONS

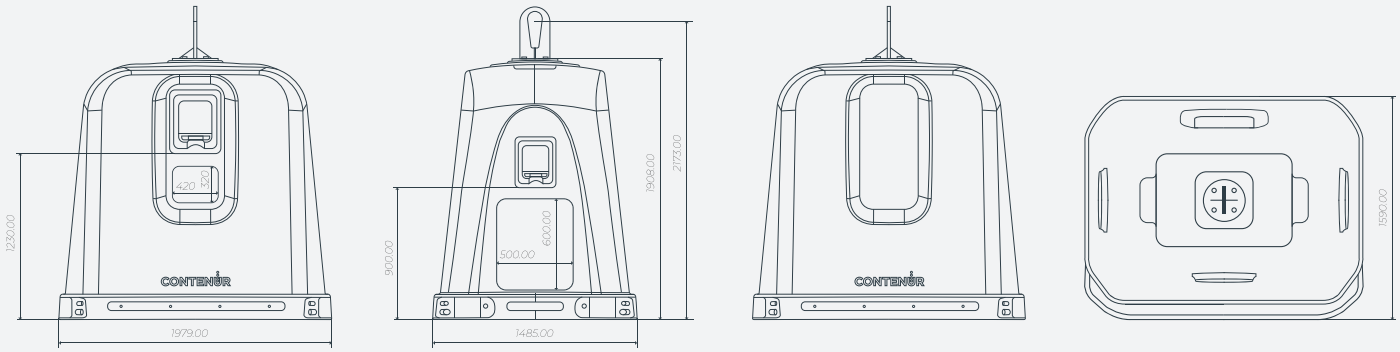

CONTENUR

BILATERAL CRANE-LIFT RANGE

CRANE-LIFT CONTAINER

OPTIK 4m³

FEATURES

- Modern design that blends in with both urban and rural landscapes.
- The new design allows for better collection and facilitates the emptying of waste from the bottom.
- The rounded design of the **OPTIK Igloo** simplifies cleaning and maintenance. Its textured coating helps prevent the adherence of graffiti and unwanted posters.
- Soundproofed: the units can be soundproofed with linear HDPE rotomoulding and an optional double-layer PE soundproofing to reduce noise during operation.
- Load bearing internal metal structure creates a very strong and robust unit.
- The plastic outer shell is designed to shelter the waste openings and protect the inner metal skeleton.
- High-resistance injection moulding of flexible PVC.
- PE injected openings and lids.
- Model specifically designed for the recycling of glass, paper, packaging and other waste.

STANDARDS

- Product designed to comply with EN-13071 regulations.
- Product designed and developed in accordance with the UNE-EN ISO 14006 standard.

EQUIPMENT AND ACCESSORIES

- Different lifting systems available: single hook, double hook and Kinshofer.
- Waste disposal openings on all 4 sides of the igloo: two on the front and rear, and one on the sides.
- Waste disposal openings at different heights for greater accessibility:
  · At the front and rear, openings at heights of 1200 mm and 1500 mm.
  · On the sides, openings at 900 mm.
- Diameter of glass opening: Ø180 mm.
- Standard rectangular opening:
  · 350 x 150 mm
- Premium rectangular opening:
  · 600 x 150 mm | 1000 x 150 mm
  · 1000 x 200 mm | 1000 x 350 mm
- Lid in lid, usable dimension: 330 x 400 mm.
- Volumetric box, volume: 40L
- Large areas for personalisation with stickers that include logos and instructions to encourage recycling:

  Front and rear area, maximum available dimension:
  · 420 x 630 mm

  Lateral area, available dimension:
  · 500 x 600 mm

3 MODELS



OPTIK 2m³



OPTIK 3m³



OPTIK 4m³

CONTENUR

BILATERAL CRANE-LIFT RANGE

CRANE-LIFT CONTAINER

OPTIK 4m³


CUSTOMISATION




PEDAL



LIFTING SYSTEM
Single hook, double hook and Kinshofer

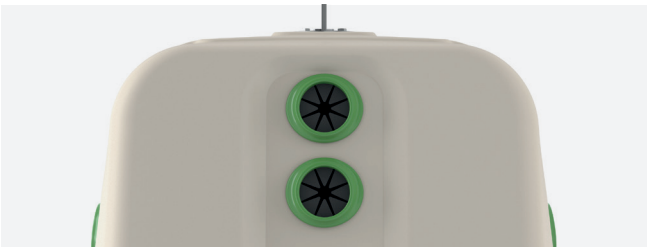

CIRCULAR OPENING
Diameter: Ø180 mm

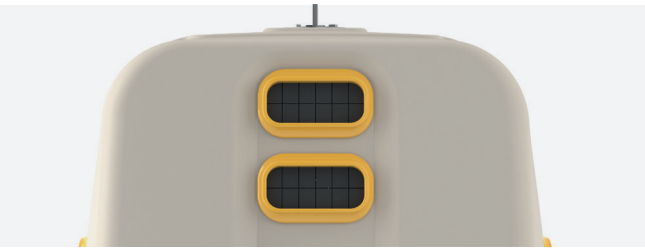

STANDARD RECTANGULAR OPENING
Usable dimension: 350 x 150 mm



PREMIUM RECTANGULAR OPENING
Usable dimension:1000 x 150 mm



LID IN LID
Usable dimension: 330 x 400 mm



VOLUMETRIC BOX



STICKER PERSONALISATION