

XS3

Concrete compliant with standard EN 206

1790_L

Small diameter



Leachate suction system

63,7_{LWA} (dB)

Directive 2000/14/CE



FEATURES

Equipment complies with Standards EN 13071-1:2008 and EN 13071-2:2008

Outer Container: Prefabricated in Concrete (C40/50) classification XS3 in compliance with Standard EN 206

Volumes available 3 m³, 4 m³ and 5 m³

Galvanised Steel Containers or traditional bag system

Lids available in HDPE and Galvanised Steel, opened by lid cover, double drum or apertures for selective collection

64.9 LW (dB) and 63.7 LWA (dB) in compliance with Directive 2000/14/EC

STANDARDS



SMALL OUTSIDE



LARGE INSIDE




LOW TEMPERATURE INSIDE



GRAVITATION COMPRESSION

COMPONENTS

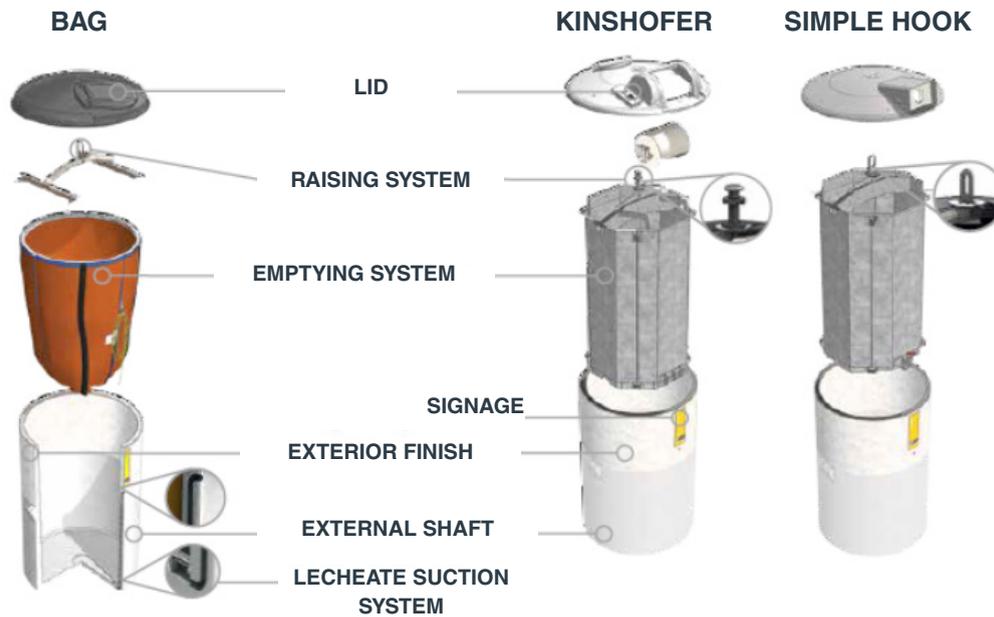

COMPONENTS

DESCRIPTION

COVER	Made of high-density virgin polyethylene or galvanised steel, with intakes tailor-made for each type of waste (lid cover, drum, selective intakes).
RAISING SYSTEM	Single Hook Systems (ring in the case of the bag container) and Kinshofer. Made entirely from hot-dipped galvanised steel in compliance with ISO 1461.
EMPTYING SYSTEM	<p>Bag Container Traditional Bag: the polypropylene bag is the waste container. A reinforced bag will be used for glass collection. MasterBAGTM : the bag will be made of polypropylene and PVC, enabling the leachates to be collected and retained independently.</p> <p>Metal Container Single Hook: Container made of hot-dipped galvanised steel, lower airtight hatch opened with a catch mechanism. Kinshofer: Container made of hot-dipped galvanised steel, lower airtight double hatch, opened with a non-rotating Kinshofer FLEX button.</p>
FINISH	Two-tone single coat, dyed concrete, mass or natural (white/grey), autoclaved timber, recycled Polyethylene, lacquered or anodised aluminium, graphic lining.
SIGNAGE	The identification plates are made of heat-lacquered aluminium and digital printing.
PREFABRICATED SHAFT	Prefabricated mono-block (C40/50), resistant to hydrostatic pressure and equipped with a leachate suction system. XS3 classification in compliance with Standard EN-206.
LEACHATE SUCTION SYSTEM	The prefabricated system has a conical bottom that enables the leachates to flow down to a grille, connected to the surface by a pipe embedded in the wall. The suction or pumping takes place from the exterior (it has a 3/8" intake)

FINISHES



COLOURED
CONCRETE



SINGLE LAYER



ANODISED
ALUMINIUM



LACQUERED
ALUMINIUM



TREATED
TIMBER




RECYCLED
POLYETHYLENE



GRAPHIC
LINING

DIMENSIONS

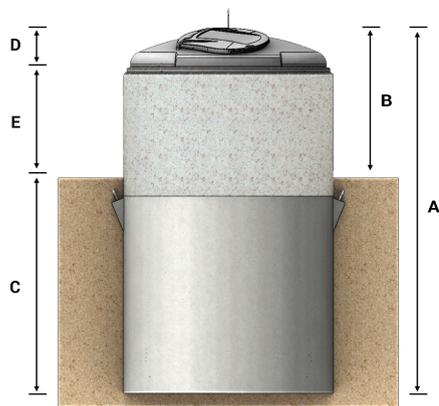

	LASSO 3m3	LASSO 5m3
A	2220 mm	3100 mm
B	1250 mm	1250 mm
C	970 mm	1850 mm
D	350 mm	350 mm
E	900 mm	900 mm
F	1795 mm	1795 mm
WEIGHT	3 Ton	4 Ton

LIDS



STANDARD
HDPE



STANDARD
HDPE / METAL
SELECTIVE AND
PRODUCERS



HDPE DOUBLE DRUM



HDPE SELECTIVE
COLLECTION
APERTURE



STANDARD
METAL



METAL DOUBLE DRUM



METAL SELECTIVE
COLLECTION
APERTURE

CIVIL WORKS

Partially-Underground Containers CSE -H Lasso™ by Contenur have been developed to minimise cost and the time taken to perform the civil works. The equipment is thus delivered ready to use. The general design of the system has been devised to optimise excavation work and the container filling ratios.

Throughout the entire installation process, Contenur's Technical Department will assist the customer to ensure that the civil works are performed correctly. It is important that all the parties involved in a project work in harmony. We provide solutions not only with high-quality but also durable equipment.



MAINTENANCE

Partially-Underground Containers CSE-H Lasso™ by Contenur are characterised by being highly resistant and cheap to maintain, having been designed for use in aggressive environments and with an average useful working life of more than 15 years.

However, as they are machines whose aim is to guarantee durability, health and safety, we recommend that they are maintained and cleaned regularly. When the equipment is delivered to customers, they are also given a detailed manual explaining what maintenance tasks are recommended and how often they should be performed.