

CRANE-LIFT RANGE

Rectangular Igloo

2500 L
Capacity


625 Kg
Maximum load

1827 mm
Height

1450 mm
Openings height



TECHNICAL SPECIFICATIONS

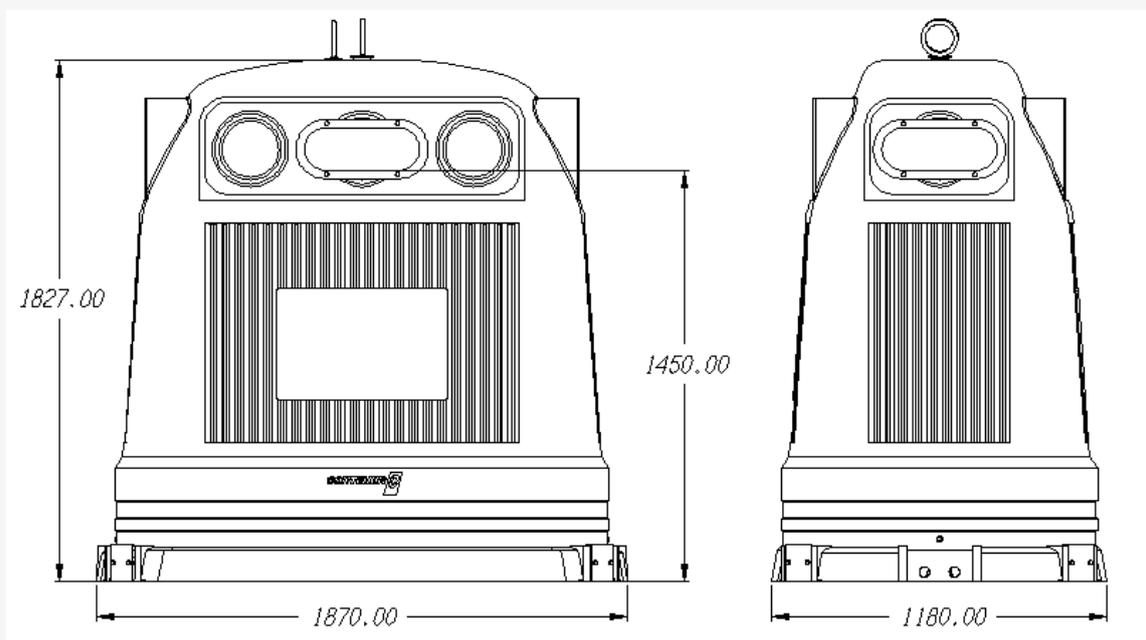

CRANE-LIFT RANGE

Rectangular Igloo

FEATURES

- CONTENUR's Crane-lift range containers are manufactured through a rotomoulding system with high-density linear polyethylene dyed in the mass and stabilised against the combined effect of water and U.V. rays; their useful life has been extended, resulting in a highly-resistant product to atmospheric factors.
- Manufactured under the strictest international standards, they have completed demanding quality and product certification tests.
- Their design has been conceived for total integration into urban surroundings, with specific solutions for each type of waste. Available in a wide range of colours and fitted with a full set of accessories, to cover any situation that may arise in city waste collection.
- Different lifting systems available: single hook, double hook or Kinshofer.
- Thanks to their manufacturing system, materials, and design, they require little maintenance.

STANDARDS

- CE Marking with sound power level shown in accordance with European Directive 2000/14/EC. 93 dB
- Compliant with European standard EN 13071-1.

EQUIPMENT AND ACCESSORIES

- Manufactured from solid-coloured high density linear polyethylene and stabilised against the combined effects of UV radiation and water, it is highly resistant to atmospheric conditions.
- Smooth surfaces. Colour stability. Total corrosion resistance.
- With an exclusively-designed Contenur outline brace, making the assembly robust and hard-wearing.
- Double hook or kinshofer crane lifting system.
- Discharge doors manufactured from rotationally-moulded high density polyethylene.
- The lifting/emptying system is corrosion resistant steel and is located on the upper part of the container.
- Possibility of customising body of the container with shields, logos, etc. using silk screen graphic or sticker.
- Customised containers for each type of waste collection: glass, paper, plastics, etc.

Circular openings, available diameters:

Ø200 mm

Ø250 mm

Rectangular openings, available dimensions:

410 x 150 mm

780 x 150 mm

925 x 150 mm

Model	Capacity	Height	Width	Weight
Rectangular Igloo 2500 L	2500 L	1827 mm	1870 mm	120 Kg



Rectangular Igloo

CRANE-LIFT RANGE

Rectangular Igloo

CUSTOMISATION

Can be equipped with a range of accessories providing real solutions to every requirement ...



MIXED RECYCLING



REFLECTIVE STRIPS




PROFESSIONAL DOOR



CUSTOMISATION WITH STICKER



LARGE PRODUCERS SYSTEM

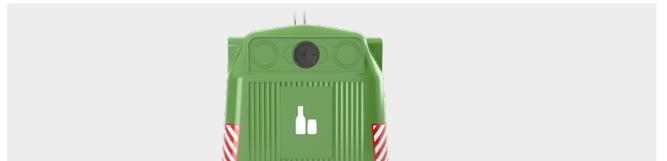

CUSTOMISATION WITH SILK SCREEN GRAPHIC



ACCESSIBLE OPENING