

REAR-LOADING CONTAINERS – 4 WHEELS

**C1000**

**1000 L**

Capacity

**400 Kg**



Nominal load

**200 mm**

Wheels diameter



**DIMENSIONS**

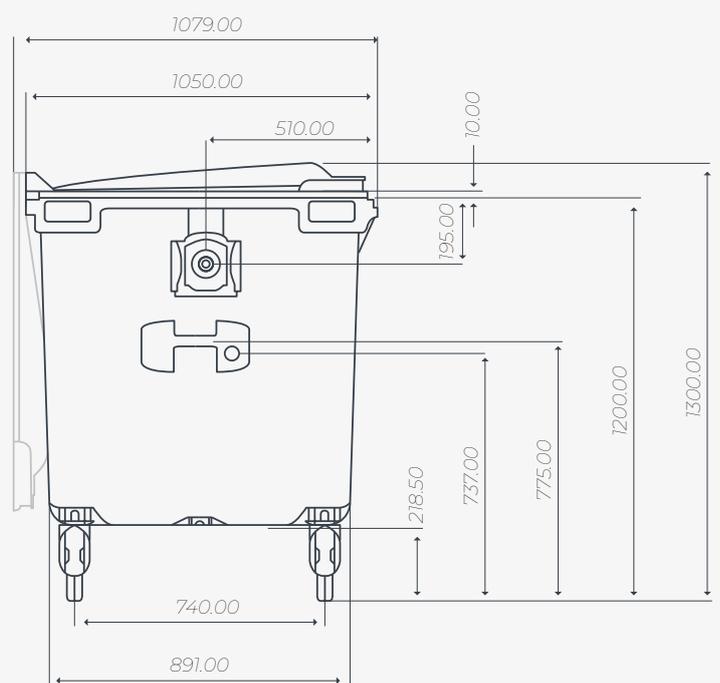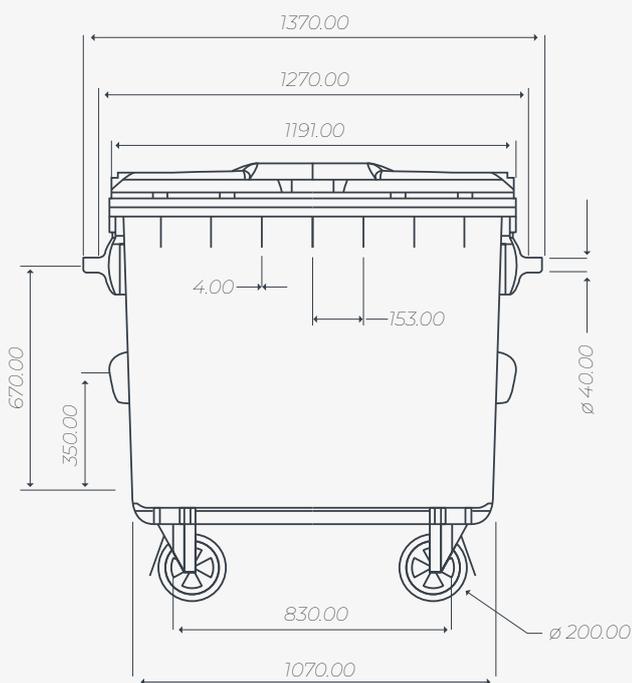

Note: Dimensions are subject to the tolerances specified in EN 840-1:2020.

## REAR-LOADING CONTAINERS – 4 WHEELS

# C1000

### FEATURES

- The rear-loading CONTENUR containers are designed with a strong focus on ergonomics and overall aesthetic quality across all components.
- They are manufactured from injection-moulded, solid-colour high-density polyethylene (HDPE), stabilised to resist the combined effects of water and UV radiation.
- The containers are produced using environmentally friendly, fully recyclable materials.
- No heavy metals are used in the pigments.

### STANDARDS

- CE marking with noise level indication in accordance with Directive 2000/14/EC of the European Parliament and of the Council, with a value of 93 dB.
- Certified in accordance with UN requirements for the transport of dangerous goods.
- Product certification issued by TÜV Rheinland.

### EQUIPMENT AND ACCESSORIES

- The containers are designed for efficient stacking, optimising logistics and reducing CO<sub>2</sub> emissions during transportation.
- The container can be customised for different waste streams, including paper and cardboard, glass, plastics, and organic waste.
- Equipped with DIN-standard lifting systems.
- The lid incorporates an integrated soundproofing system.
- A built-in recess is incorporated for electronic identification chips.
- The wheels are designed to minimise dirt adhesion and facilitate cleaning.
- Four-wheel container fitted with a brake to prevent displacement.
- The container body and lid can be customised with logos or other graphics using a thermal transfer printing system.
- Body customisation via thermal transfer graphics is available. Maximum size of 400 x 400 mm.
- Lid customisation via thermal transfer graphics is available. Maximum size of 45 x 230 mm.



REAR-LOADING CONTAINERS – 4 WHEELS

# C1000

## CUSTOMISATION

Can be equipped with a range of accessories providing real solutions to every requirement.



PAPER OPENING



CIRCULAR OPENINGS



CUSTOMISATION BY THERMAL  
TRANSFER GRAPHIC



LID IN LID  
Usable dimensions: 300 x 250 mm




LARGE LID IN LID  
Usable dimensions: 400 x 330 mm



RUBBER LID IN LID  
Usable dimensions: 285 x 150 mm



PEDAL

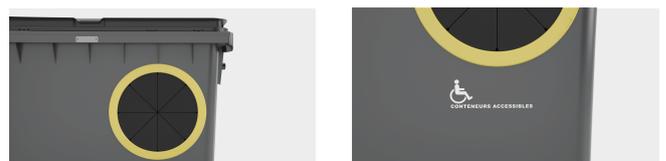

ACCESSIBILITY PACKAGE