

REAR-LOADING CONTAINERS - 4 WHEELS

# Clinical Waste Containers

REAR-LOADING

**660 L**  
**1100 L**  
Capacity


**264 Kg**  
**440 Kg**  
Nominal load

**160/200 mm**  
Wheel diameter




## DIMENSIONS

**C660L**

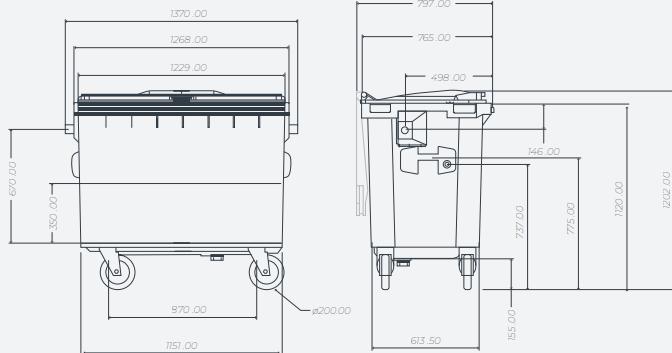

**C1100L**

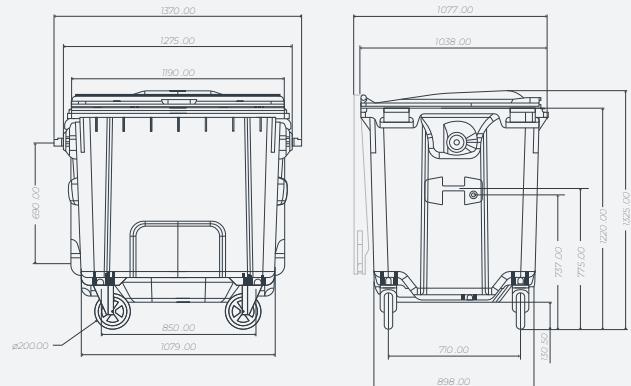

## REAR-LOADING CONTAINERS - 4 WHEELS

# Clinical Waste Containers

## INSTRUCTIONS

- These operating instructions provide useful information for the user. The information is necessary for the proper handling of ADR waste containers.
- For more information on the 700 L, 800 L, and 1100 L containers, please consult the CONTENUR website, as well as standards EN 840-2, EN 840-5, EN 840-6, and the certificates in accordance with the UN "Large Packaging" standard applicable to this type of container.
- These containers are certified for the storage and transport of infectious substances, Class 6.2, subdivision I3, for clinical waste.
- The containers are intended for the collection of ADR waste (in accordance with EN 3291), for which legal transport regulations apply. See applicable national legislation, ADR regulations, RID regulations, and the IMDG amendment.

## CERTIFICATION

- The containers have been certified according to UN 3291 and are marked with the following registration: C240 / C360 UN 50H/Y/\*E/\*\*/SE-0015/0/\*\*.
- This hazardous waste marking must be applied on both sides of the container body, on the right and left sides of the four-wheeled containers: 660 L, 770 L, and 1100 L.
- Our containers have been tested and comply with ADR regulations.

## EQUIPMENT AND ACCESSORIES

- The containers are designed for efficient stacking, optimising logistics and reducing CO<sub>2</sub> emissions during transportation.
- The containers can be fitted with a manual lock on the front or a lever lock on each side. Both locking systems can be combined.
- The containers are equipped with integrated side and rear handles in the container body, facilitating gripping and handling.
- The lid incorporates an integrated soundproofing system.
- Dedicated housing for the installation of chips to enable container tracking and identification.
- As standard, the 660 L and 770 L containers are equipped with 160 mm wheels, and the 1100 L containers with 200 mm wheels, to facilitate handling depending on the load.
- The container body and lid can be customised with logos or other graphics using a sticker or via thermal transfer printing system.
- Body customisation via thermal transfer graphics is available. Maximum size of 400 x 400 mm.



REAR-LOADING CONTAINERS - 4 WHEELS

# Clinical Waste Containers

## CUSTOMISATION

Can be equipped with a range of accessories providing real solutions to every requirement.



MANUAL LOCK



SIDE LEVER LOCK



REAR HANDLES



SIDE HANDLES



NON-MARKING GREY WHEELS



REINFORCED WHEELS



TRAIN SYSTEM



ID CHIP, 125 KHZ OR 13.56 KHZ



DIN SYSTEM



CUSTOMISATION BY THERMAL TRANSFER GRAPHIC