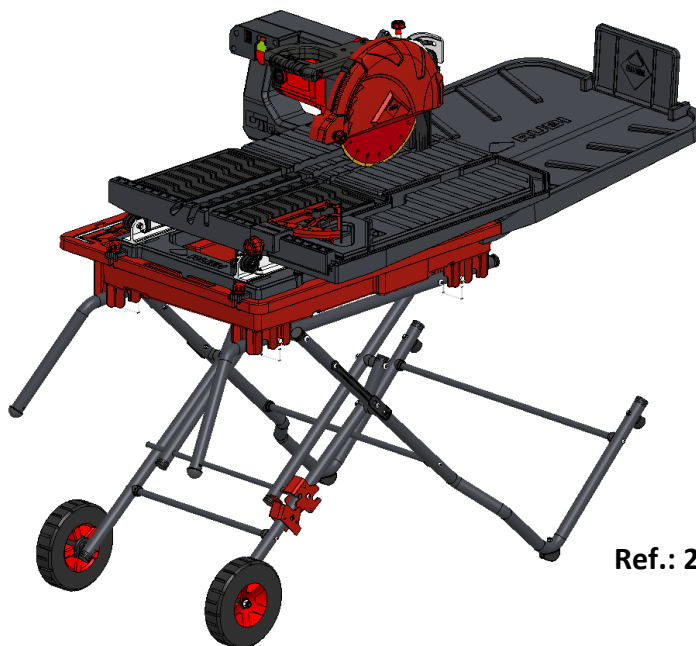


**Ref.: 26994**

USE

Portable electric cutter with plunge effect (Vertical cut).

Ideal for PROFESSIONAL cut of wall & floor ceramic tiles, included Porcelain Stoneware and other materials.

Perfect for repairs and renovations.

FEATURED CHARACTERISTICS

Phyton cooling system combined with the Zero Dust system, keeps your work area clean by reducing the production of splashes.

Incorporates tubular steel support with wheels and foldable, to transport the machine easily.

With lateral stop for repetitive cuts with adjustment from 0 ° to 45 °.

Magnetic holder for the disc key.

Premium Diamond Blade: For fast, smooth cuts with long life.

OTHER FUNCTIONAL CHARACTERISTICS

Laser pointer to facilitate the placement of the ceramic and obtain more precise cuts.

Tilting cutting head adjusts for precise 22.5 ° and 45 ° bevel cuts.

Disc flanges accessory set for reinforced discs (Venom, VIP).

Deposit with level indication min. and max.

Maximum capacity: 5.02 gal / 19 L

Aluminum main table with rubber surface. Table extensions, lateral and back, in reinforced plastic.

www.rubi.com



TECHNICAL SPECIFICATIONS

- Amperage: 15 A
- Voltage: 120 V / 60 Hz.
- P1 (kW): 1.80 kW
- RPM: 4000
- Max. cutting length: 36 in (900 mm)
- Max. tile format in diagonal: 24 in. (600 mm)
- Max. thickness: 3.75 in. (95 mm)
- Max. thickness when mitring: 0.98 in. (25 mm)
- Dimensions: 63 x 36.8 x 48.4 in (1600 x 935 x 1230 mm)
- Net weight DT: 76 lbs (34.5 kg)
- Net weight DT + support: 100 lbs (45.35 kg)
- Cable length: 6.7 ft (2.05 m)
- Flanges: 2.44 in (62 mm) / 3.91 in (99.5 mm)
- Diameter flanges shaft: 5/8 in

PACKAGING

Carton box with RUBI flexography.

Unitary box dimensions: 48.5x36.8x31.5 in (1310x935x800 mm)

Gross weight: 109,13 lb (49,500 kg)

Units par pallet: 1.

NORM

Meets de following standards:

UL STANDARD 987

CSA STD C22.2 NO. 71.2:201

www.rubi.com