



REF. 3995


USE

For easy and precise adjustment of the space between large format tiles during floor or wall covering, it also guarantees to maintain the placement at different degrees to adapt to any need of the installer.

FUNCTIONAL CHARACTERISTICS

SUPERPRO quality tile gap regulator.

Multiple positioning: Allows placement, adjustment and levelling at 90°, 180° and 270°

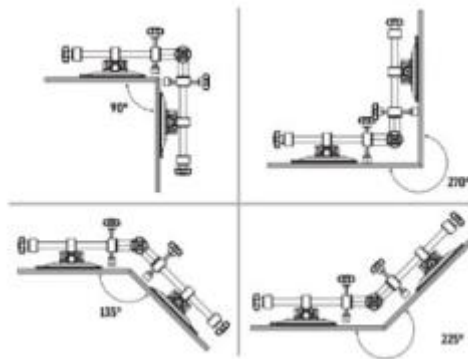

150 mm vacuum suction cups with tabs for quick and easy release, suitable for any type of tile surface (flat, rough, structured, etc.)

Easy and smooth adjustment thanks to the adjustment screw with knob.



OTHER CHARACTERISTICS

For lateral displacement of tiles and gap reduction between 0 - 40 mm.

Enables to equal the level of the tiles between 0 - 20 mm.

Maximum lifting capacity up to 100 Kg (220 lbs)

Recommended for use in pairs.

Includes:

- 6mm Allen key.
- 10mm Allen key.
- 17mm open hex key.

THECNICAL SPECS

Material: Steel, plastic and rubber.

Dimensions: 480 x 150 x 120 mm

Net weight: XXX

PACKAGING

Sales unit: 1 unit / box

Unitary box dimensions: 480 x 160 x 120 mm (B1)

Unitary box total weight: XXX

Units per pallet: XXX

www.rubi.com



TILE REGULATOR 90º

VERSIÓN:

R-V1.01

FECHA:

SEP 2024

www.rubi.com