


RETICULATED POLYURETHANE FLOAT



PERFECT FINISH
FOR FLOATING MORTAR PLASTERING

USE

- FOR FINISH FLOATING MORTAR PLASTERING.
- IDEAL FOR VERTICAL JOBS IN HEIGHTS.
- SUITABLE FOR ANY SIZE OF SURFACE.

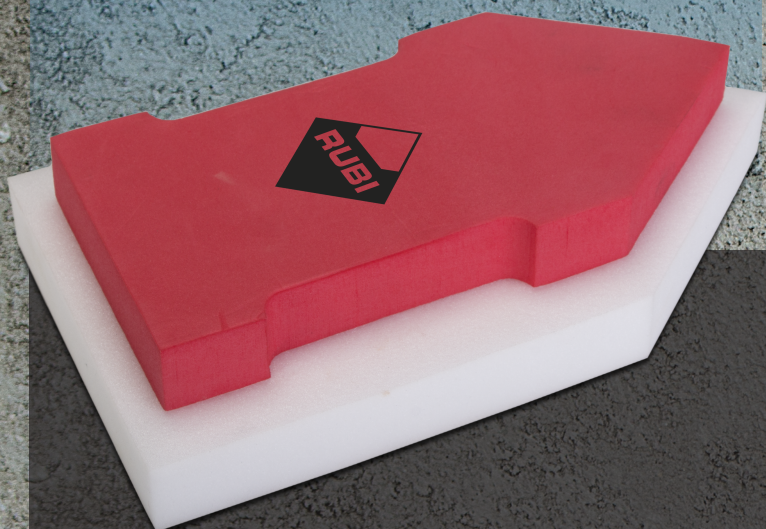

33
KG/M³ DENSITY



35
GR NET



22,5X12X5
DIMENSIONS



10
UNITS / BOX


FUNCTIONAL CHARACTERISTICS

- MAXIMUM LIGHTNESS & RESISTANCE TO WEAR OFF.
- VERY LOW WATER ABSORPTION ($\leq 1\%$).
- GUARANTEES DIMENSIONAL STABILITY.



Ref. 83998

RETICULATED POLYURETHANE
POINTED FLOAT

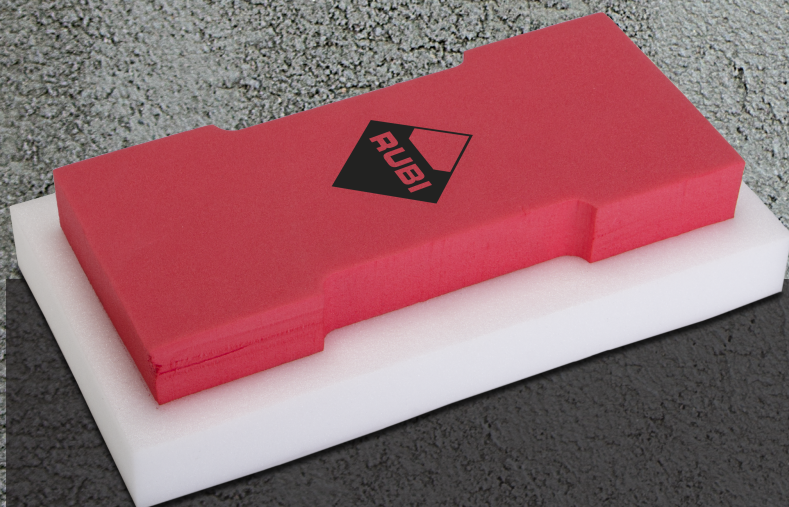

33
KG/M³ DENSITY



30
GR NET



22,5X12X5
DIMENSIONS



10
UNITS / BOX



Ref. 83999

RETICULATED POLYURETHANE
RECTANGULAR FLOAT



8 413797 925227

Ref. 92522



WWW.RUBI.COM